




multi•mount

standoffs

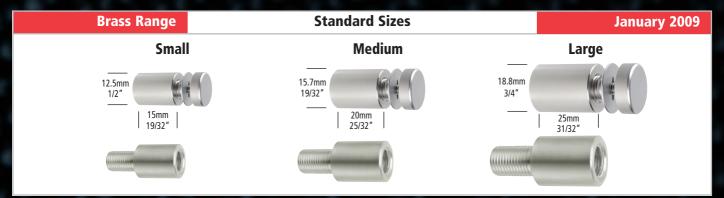

Standard Parts Maximum Loads and Widths Optional Extras A part D part D part D part

The internal back wall of A parts is designed to accomodate the head of an 8 or 9 guage countersunk screw or bolt.

B parts screw into A or D parts.
Thread Size: 10mm = 3/8"

C parts screw into B parts.

Thread Size: 4.75mm = 3/16"

D part D parts screw between A and B parts to hold more panels and/or increase the standoff distance. Thread Size: 10mm = 3/8"

PART B PA		ARTS C PA		RTS	D PARTS	
SIZE 🔻	Metric	Imperial	Metric	Imperial	Metric	Imperial
SMALL						
Max load per part	18.00 kgs	39.60 lbs	15.00 kgs	33.00 lbs	18.00 kgs	39.60 lbs
Max panel weight	36.00 kgs	79.20 lbs	30.00 kgs	66.00 lbs	36.00 kgs	79.20 lbs
Max panel width	6 m m	1/4"	6mm	1/4"	6 m m	1/4"
MEDIUM						
Max load per part	24.00 kgs	52.80 lbs	15.00 kgs	33.00 lbs	24.00 kgs	52.80 lbs
Max panel weight	48.00 kgs	105.60 lbs	30.00 kgs	66.00 lbs	48.00 kgs	105.60 lbs
Max panel width	9 m m	11/32"	9 m m	11/32"	9 m m	11/32"
LARGE						
Max load per part	30.00 kgs	66.00 lbs	15.00 kgs	33.00 lbs	30.00 kgs	66.00 lbs
Max panel weight	60.00 kgs	132.00 lbs	30.00 kgs	66.00 lbs	60.00 kgs	132.00 lbs
Max panel width	12 m m	1/2"	10 m m	3/8"	12mm	1/2″

IMPORTANT

- Maximum load per multimount should not exceed the maximum load per B part.
- Maximum total load should not exceed the maximum panel weight in the B parts column.

Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.